

CITE

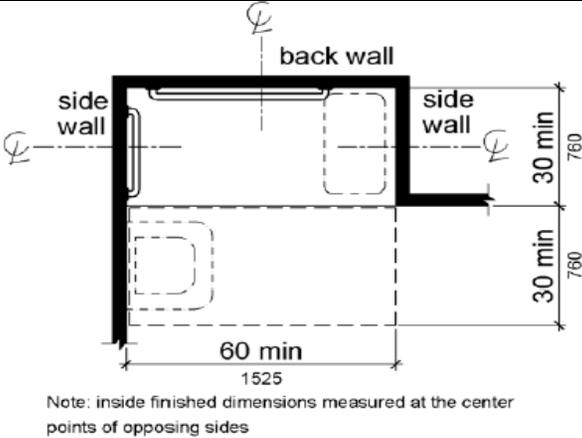
ELEMENT: LOCKER ROOMS

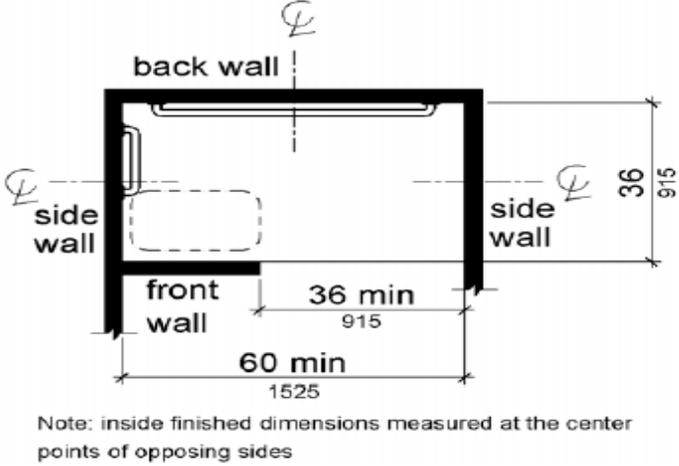
M

W

Notes:

CITE	ELEMENT: LOCKER ROOMS	M	W	Notes:
225.2.1	Lockers: Are at least 5% of the lockers and at least one of each type accessible?	No	No	
Smart Practice	Are at least 5% of lockers identified by the International Symbol of Accessibility?	No	No	M: 0/11 W: 0/4 (WW101)
811.2 305.3	Is there clear floor space around the lockers?	Yes	Yes	
811.3 308	Are storage elements and operable parts within reach range?	No	No	M/W: hooks at 51" (WW89), shelf at 55" (WW90 , WW91)
811.4 309.4	Is the hardware operable without a tight pinch or grasp? (fist)	No	No	
308 803.5	General Features: If coat hooks are provided, is at least one within reach range?	No	n/a	M: 62" (WW92)
803.5 222.2	Is at least one shelving unit 40" min and 48" max aff?	n/a	n/a	
903.4	Benches: (n/a if dressing stalls are present, compliant bench should be in stall) If a bench is provided, is it at least one accessible? <ul style="list-style-type: none"> • 42" long seat • Seat 20-24" deep • Seat affixed to the wall w/max 2.5" gap or with seat back w/less than 2.5" gap and 18" min from seat upward • Seat height 17-19" aff 	No	No	(WW93 , WW95)
	Roll-In Type Showers:			
608.2.2	Is the roll-In type shower compartment 30" wide min by 60" long min with a clear opening of 60" ?	No	No	M: 48" X 42" W: 48.5" X 42.5" (WW103 x WW102)

	 <p>Note: inside finished dimensions measured at the center points of opposing sides</p>			
608.3.2	Is there a clear floor space 30" wide and 60" long?	No	No	
608.3.2	If a seat is provided, are there grab bars on the back wall and side wall opposite the seat?	Yes	Yes	
608.3.2	If a seat is not provided, are grab bars provided on 3 walls and installed 6" from the adjacent walls?	n/a	n/a	
11B-608.5.2	Are the controls, faucets, and shower spray installed above the grab bar 48" max aff and centerline 39"-41" aff? <i>If a seat is provided, are the controls, faucets, and shower spray located on back wall 19" min and 27" max from the seat wall?</i>	No	No	M/W: across from seat as in a transfer shower (WW94 , WW96)
608.7	Is the shower stall threshold .5" max?	Yes	Yes	
	Alternate Roll-In Type Showers:			
608.2.3	Are the inside dimensions 36" W X 60" D?	n/a	n/a	

	 <p>Note: inside finished dimensions measured at the center points of opposing sides</p>	M	W	Notes:
608.2.3	Is there a 36" W entry on one end of long side?	n/a	n/a	
608.3.3	Are grab bars provided on the back wall and side wall farthest from the entry? (not above the seat) Are they 6" max from the adjacent walls?	n/a	n/a	
608.5.3	Are the shower controls located above the grab bar no higher than 48"?	n/a	n/a	
608.5.3	If a seat is provided, are the controls located on the side wall adjacent to the seat 27" max from the side wall behind the seat or on the back wall opposite the seat 15" max, left or right of the centerline of the seat?	n/a	n/a	
608.5.3	Where a seat is not provided, are the controls located on the side wall farthest from the compartment entry?	n/a	n/a	
608.7	Is the shower stall threshold .5" max?	n/a	n/a	
608.6	All Shower Types: Is the shower spray on 59" long hoses min and is usable as a hand-held as well as a fixed shower head or is there a fixed shower head 48" aff?	Yes	Yes	
309.4	Do they require less than 5lbs of force to operate?	Yes	Yes	
609.3 609.4	Are grab bars mounted 33-36" aff with 1.5" clearance between the grab bar and wall?	Yes	Yes	

CITE ELEMENT: LOCKER ROOMS M W Notes:

609.2	Are the diameters of the bars 1.25 -1.5" or does the shape provide equivalent grip surface?	Yes	Yes	
610.3.1	If shower seats are provided, are they rectangular or L-shaped?	Yes	Yes	
11B-610.3	Is the seat a fold away, and when folded does it project a max of 6" from seat wall?	Yes	Yes	
610.3	If bench is provided is it installed bet. 17-19" from the floor?	Yes	Yes	
610.3	Is the bench installed with the front of the seat extending to within 3" of the front of the compartment?	No	No	M: 7" (WW97) W: 8.5" (WW104)
610.3.1	If rectangular, is the rear edge 2.5" max and front edge 15"-16" max from seat wall? Side edge shall be 1.5" from adj. wall.	n/a	n/a	
610.3.2	If L shaped, is the rear edge 2.5" max and the front edge 15"-16" max from the seat wall? The rear edge of the "L" portion shall be 1.5" max from the wall and the front edge shall be 14"-15" max from the wall. The end of the "L" shall be 22"-23" max from the main seat wall.	No	No	M/W: 13" short edge (WW98), 20.5" long edge (WW99), 19.5" at rear L (WW100)
	<p>(a) size</p> <p>(b) distance from wall</p>			
11B-608.9	Are floors of showers sloped at 2.08% max and if having grates, are openings max .25"?	Yes	Yes	

CITE

ELEMENT: LOCKER ROOMS

M

W

Notes:

11B-608.10	If a soap dish is provided, is it mounted max 40" aff and within reach of seat?	Yes	Yes	
222.1	Dressing Stalls: Does 5% min or one dressing stall in each cluster, connect to an accessible route?	n/a	n/a	
304 803.2	Is there clear floor space in the dressing stall (60" wide x 60" deep) and immediately adjacent to the curtained area (36" wide x 48" deep)?	n/a	n/a	
304 803.3	Is the clear floor space unobstructed by a swinging door?	n/a	n/a	
803.4	Does every accessible dressing room stall have a 24" x 42" fixed bench on the wall along the longer dimension?	n/a	n/a	
903.5	Is the bench mounted 17-19" AFF?	n/a	n/a	
11B-803.5 308 222.2	Is at least one coat hook within reach range? (coat hooks shall not be located above a bench or other seating)	n/a	n/a	
803.5 222.2	Is at least one shelving unit 40" min and 48" max aff?	n/a	n/a	
11B-222.3	Mirrors: where there are no dressing compartments, is there a full length mirror in the general locker area; where there are compartments, is the full length mirror in the accessible dressing stall?	n/a	n/a	
11B-803.6	Is mirror installed with the bottom edge of the reflecting surface 20 inches (508 mm) maximum above the finish floor or ground. Mirrors shall be full length with a reflective surface 18 inches (457 mm) wide minimum by 54 inches (1372 mm) high minimum and shall be mounted in a position affording a view to a person on the bench as well as to a person in a standing position?	n/a	n/a	
612.2 612.3	Saunas and Steam Rooms: Is there turning space and at least one accessible bench provided?	n/a	n/a	

OTHER

NOTE: If there is no restroom in the locker area, add the locker room space to the rooms and spaces checklist

Rev. 07/31/13